





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/1/05	PJP
B	ECN 5220: CREATE MODEL, NEW DRAWING FORMAT	2/4/11	D.FRISIELLO
C	ECN 8456 UPDATE DRAWING	B.PUCHASKI 08/22/16	

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
PIN	BRASS	GOLD PLATE
DIELECTRIC	PTFE	NATURAL
SHELL	BRASS	NICKEL PLATE
RETAINING RING	BRASS	NICKEL PLATE
GASKET	SI-RUBBER	ORANGE

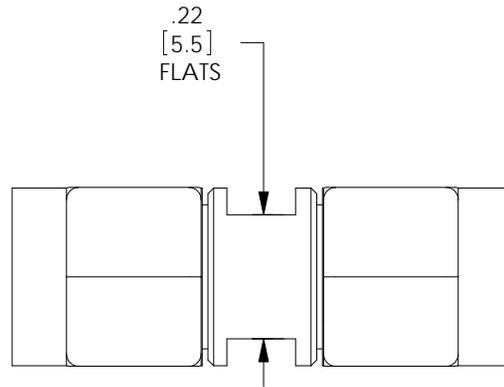

1/4-36UNS-2B
BOTH ENDS

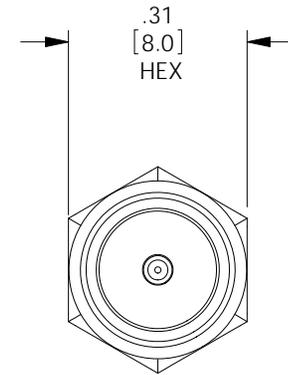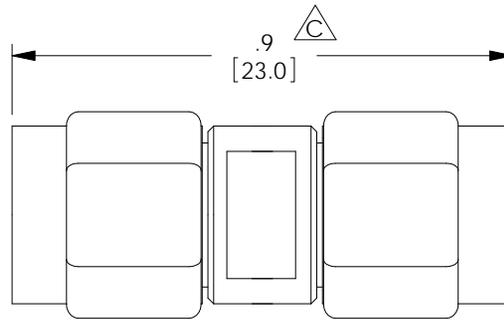

NOTES:

IMPEDANCE: 50 OHM
 FREQUENCY RANGE: 0 ~6 GHz
 INSERTION LOSS: .15 dB MAX.
 VOLTAGE RATING: 500 VRMS MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 1000 Vrms MIN.

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 [2.54] .XX = ±.01 [.25] .XXX = ±.005 [.13] ANGULAR TOLERANCES: ALL = ± 1°	APPROVALS DRAWN BY J.C.	DATE 3/1/05	50 HIGH STREET NORTH ANDOVER, MA 01845		
	CHECKED BY P.PESA	3/1/05		CATEGORY COAXIAL	
	APPROVED BY P.PESA	3/1/05	PRODUCT DESCRIPTION ADAPTER SMA-M/SMA-M BARREL TYPE		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. AXA-SMSM
PROJECTION 	SCALE: NONE		CAD FILE: AXA-SMSM.SLDDRW	SHEET 1 OF 1	