
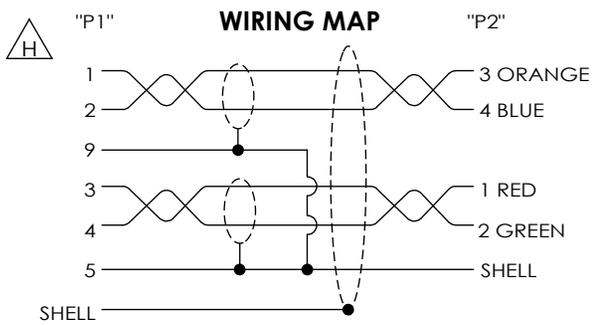


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
H	ECN 8978; REVISE CONNECTIVE DETAIL FOR TWIST PAIR OF WIRING MAP	11/03/2017	B.ZHANG

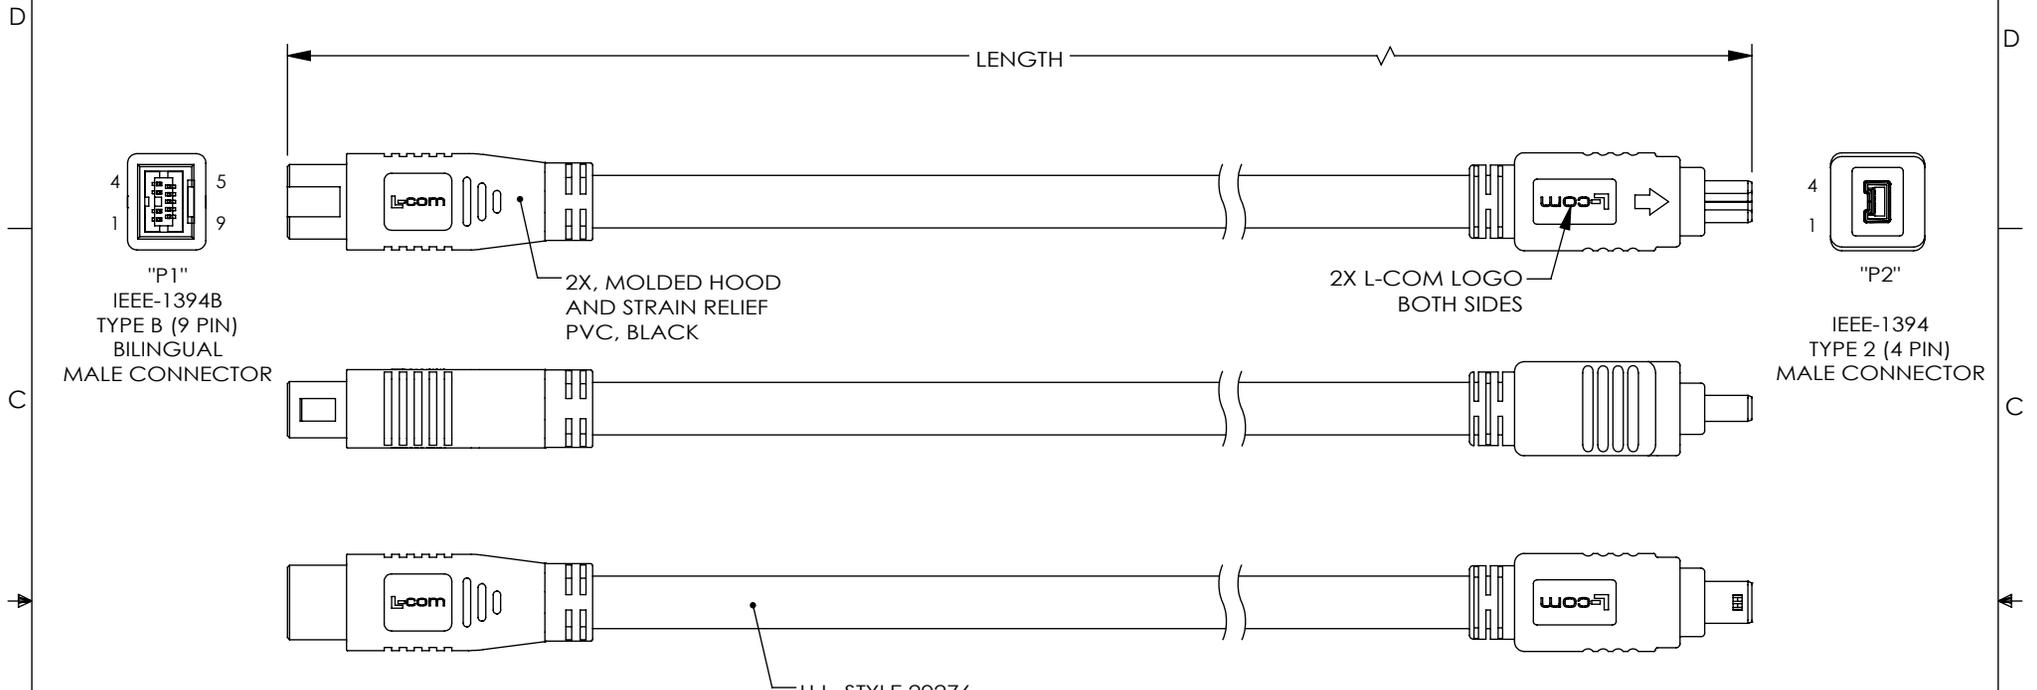

U.L. STYLE 20276,  
TWO, 26 AWG INDIVIDUALLY SHIEDED TWISTED PAIR  
WITH TINNED COPPER DRAIN WIRE.  
TWO, 22 AWG STRANDED CONDUCTORS WITH OVERALL  
ALUM/POLY SHIELD PLUS TINNED COPPER BRAID SHIELD.  
JACKET: PVC, BLACK

MODEL NUMBER	LENGTH	
	METERS	FEET
CSM94B2-1M	1.0	3.28
CSM94B2-2M	2.0	6.56
CSM94B2-3M	3.0	9.84
CSM94B2-5M	5.0	16.40

**NOTES:**

1. CABLE ASSEMBLY CONSTRUCTED TO MEET THE REQUIREMENTS OF THE IEEE-1394B (FIREWIRE) SPECIFICATION.
2. CONTACT FINISH: GOLD FLASH.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	12/11/2003		CATEGORY <b>I/O PRODUCTS</b>
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ±.005 [.13]	CHECKED BY D.PARHAM	12/11/2003	PRODUCT DESCRIPTION <b>CBL,IEEE1394B 9/4POS</b>	
PROJECTION 	APPROVED BY R.CARRICK	12/11/2003	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	SCALE: NONE
COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>CSM94B2</b>	REV. <b>H</b>
CAD FILE: CSM94B2.SLDDRW			SHEET 1 OF 1	