


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/22/13	D.GRIFFIN
B	ECN 7297: UPDATED ROHS NOTE AND FORMAT	2/17/14	D. DESJARDIN

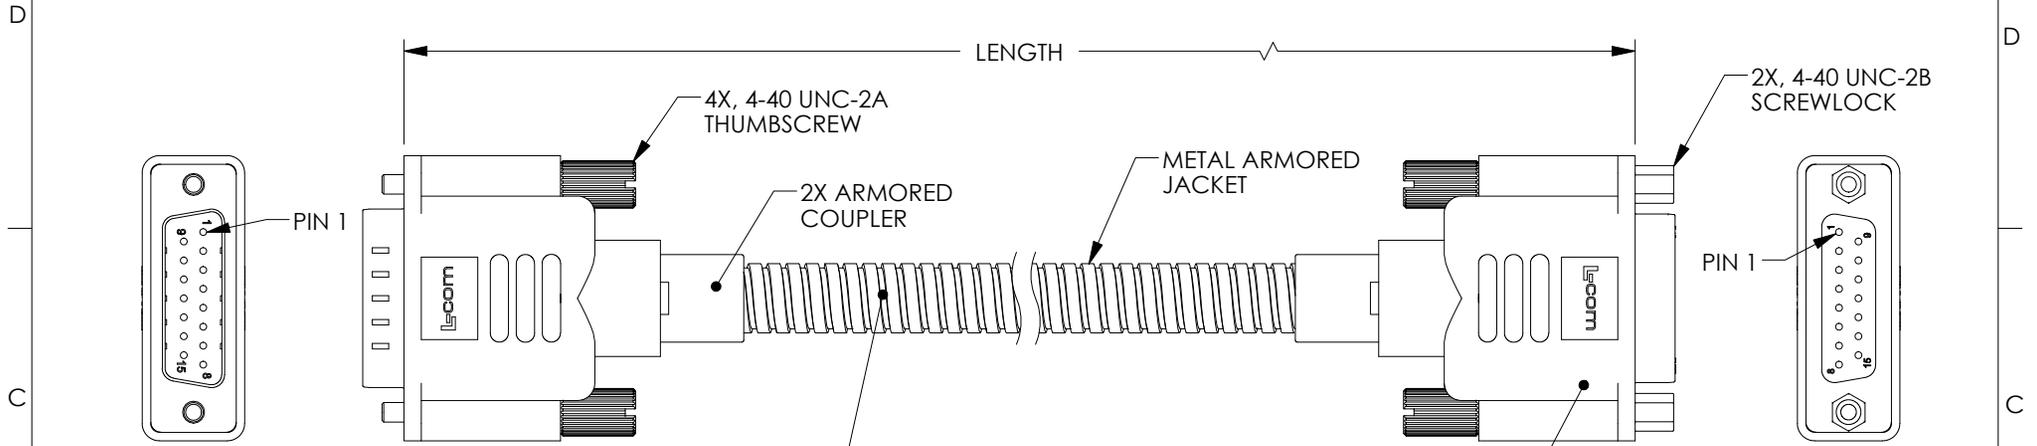

UL STYLE 2919, 15 CONDUCTOR (26AWG) CABLE WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE PLUS TINNED COPPER BRAID SHIELD. JACKET: PVC, LIGHT GRAY (PANTONE 400C)

2X, PVC OVERMOLD/STRAIN RELIEF COLOR: BLACK, WITH INTERNAL METAL BACKSHELL/SHIELD L-COM LOGO ON BOTH SIDES

"P1"	COLOR	"J1"
1	BLACK	1
2	BROWN	2
3	RED	3
4	ORANGE	4
5	YELLOW	5
6	GREEN	6
7	BLUE	7
8	VIOLET	8
9	GRAY	9
10	WHITE	10
11	PINK	11
12	LIGHT GREEN	12
13	BLACK/WHITE	13
14	BROWN/WHITE	14
15	RED/WHITE	15
SHELL	DRAIN WIRE	SHELL

MODEL NUMBER	LENGTH	
	FEET	METERS
CSMT15MF-2.5	2.5	.76
CSMT15MF-5	5.0	1.52
CSMT15MF-10	10.0	3.05
CSMT15MF-15	15.0	4.57
CSMT15MF-25	25.0	7.62
CSMT15MF-50	50.0	15.24

**NOTES:**

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D.FRISIELLO	5/11/11				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.PARHAM	5/11/11	CATEGORY D-SUBMINIATURE			
	APPROVED BY S.SMITH	5/11/11	PRODUCT DESCRIPTION CA DB15M/F MTL ARMOR			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. CSMT15MF	REV. <b>B</b>
SCALE: NONE			CAD FILE: CSMT15MF.SLDDRW		SHEET 1 OF 1	