

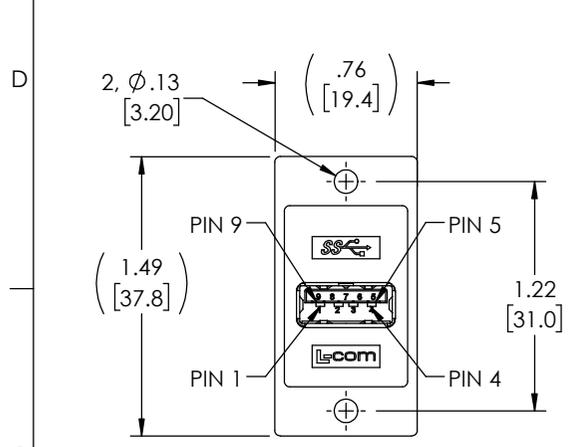



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/23/2020	D.GUTTADAURO

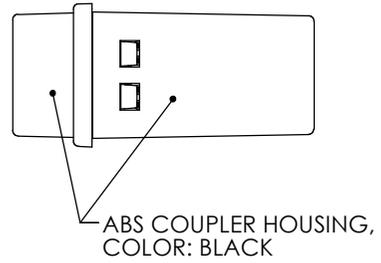


"J1"  
USB 3.0 TYPE "A"  
FEMALE CONNECTOR  
30u" GOLD PLATED CONTACTS  
NICKEL PLATED SHELL

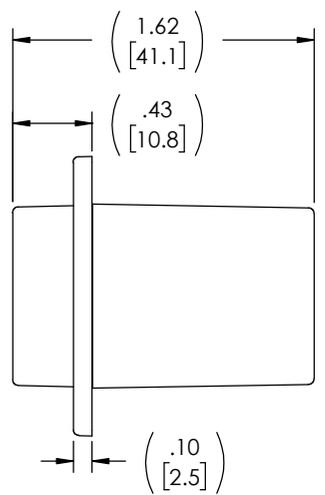

"J2"  
USB 3.0 TYPE "A"  
FEMALE CONNECTOR  
30u" GOLD PLATED CONTACTS  
NICKEL PLATED SHELL


"J1"	WIRING MAP	"J2"
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	8
6	_____	9
7	_____	7
8	_____	5
9	_____	6
SHELL	_____	SHELL

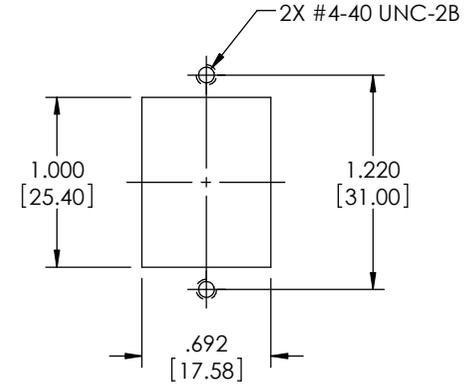

RECOMMENDED  
PANEL CUTOUT

**NOTES:**

- RATING:  
CURRENT: 1.8A (P1 & P4 CONTACTS); 0.25A(OTHER CONTACTS)  
VOLTAGE: 30V max.  
OPERATING TEMPERATURE: -10 °C TO +70 °C.
- COUPLER SHALL BE TESTED FOR CONTINUITY.
- COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCES: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY B.ZHANG	08/18/2020	
CHECKED BY D.CONTROL	08/18/2020	PRODUCT DESCRIPTION USB 3.0 COUPLER PNL MNT, AF-AF BLACK	
APPROVED BY D.GUTTA DAURO	08/18/2020	SIZE <b>A</b>	CAGE CODE <b>43321</b>
THIRD-ANGLE PROJECTION 		DWG. NO. ECF504-3AA-BLK	REV. <b>A</b>
COLOR VARIATIONS MAY OCCUR		SCALE: NONE	CAD FILE: ECF504-3AA-BLK.SLDDRW
		SHEET 1 OF 1	