
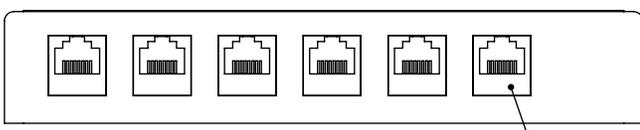
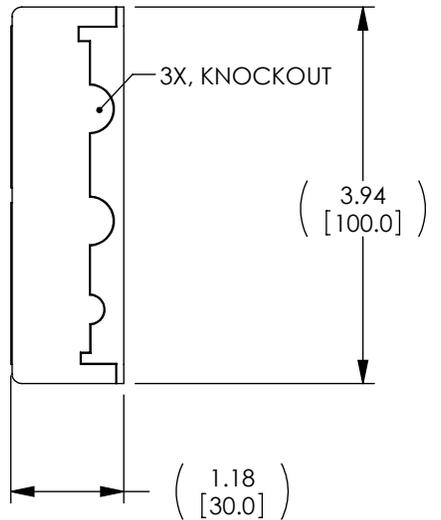


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/1/10	D.GRIFFIN

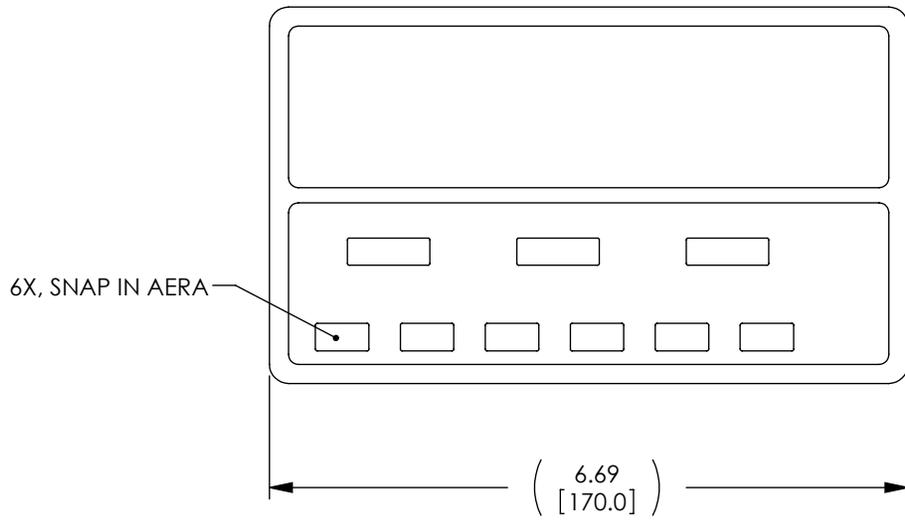

SPECIFICATIONS:

MATERIAL:

HOUSING: HIGH IMPACT FLAME RETARDANT PLASTIC, UL94V-0,
COLOR: WHITE

ELECTRICAL:

JACK WIRING: 50μ IN OF GOLD OVER 100μ IN OF NICKEL.
CURRENT RATING: 1.5 AMPS

MECHANICAL:

PLUG INSERTION LIFE: 750 CYCLES MIN.
TEMPERATURE RANGE: -40°F TO +150°F (-40°C TO 68°C)

MISCELLANEOUS:

CONNECTOR: 110 INSULATION DISPLACEMENT CONNECTOR (IDC)
ACCEPT 22 - 26 AWG SOLID WIRE AND ARE COLOR CODED FOR
EIA568A AND B WIRING.

SURFACE BOX IS SUPPLIED WITH BLUE AND RED SNAP-IN ICONS, WRITE
-IN STRIPS, DOUBLE SIDED ADHESIVE AND WOOD SCREWS.

PACKAGING: COMPONENT AND SUPPLIES SHALL BE INDIVIDUALLY
PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR TOLERANCES: ALL = ± 1° PROJECTION	APPROVALS DRAWN BY D.FRISIELLO CHECKED BY C.JEREZ APPROVED BY P.McNEIL	DATE 9/30/10 9/30/10 9/30/10	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845 CATEGORY MODULAR	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY			PRODUCT DESCRIPTION 6 PORT CAT 5 SURFACE MOUNT JACK
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. SMM45-6W
	SCALE: NONE		CAD FILE: SMM45-6W.SLDRW	SHEET 1 OF 1