
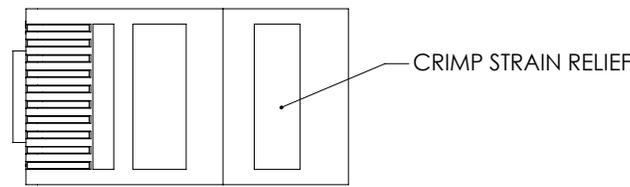
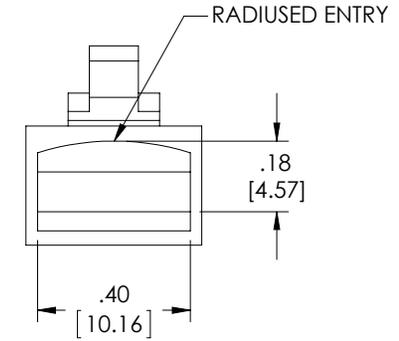
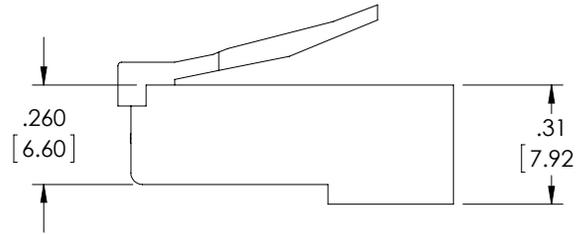
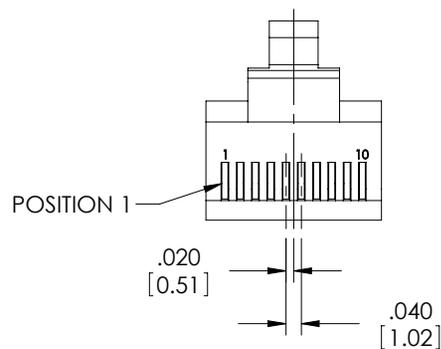


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES TDR10P10C-OD1 AT REV E	11/14/14	D. CASTRO

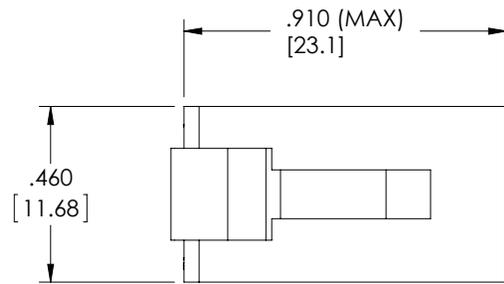

*CONTACTS SHOWN CRIMPED

NOTES:

MATERIALS:
 HOUSING: POLYCARBONATE UL94V-0
 CONTACTS: COPPER ALLOY
 CONTACT PLATING: 15 μINCHES GOLD

ELECTRICAL:
 CURRENT RATING: 2.0 AMP MAX
 VOLTAGE RATING: 250 VAC MAX
 INSULATION RESISTANCE: 500 MΩ MIN

MECHANICAL:
 CONDUCTOR ACCEPTANCE: 24 TO 26 AWG
 MAX CONDUCTOR OD: .038"
 CONDUCTOR TYPE: STRANDED OR SOLID
 CONTACT STYLE: TWO PRONG

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -40°C TO +125°C

MISCELLANEOUS:
 DIMENSIONS ARE FOR REFERENCE ONLY.
 COMPONENT SHALL BE BULK PACKAGED 100 PIECES PER BAG IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ±.005 [1.3]	APPROVALS DRAWN BY D. PARHAM CHECKED BY T. CLARK APPROVED BY C. McCORMICK	DATE 3/29/2002 3/29/2002 3/29/2002	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845				
	CATEGORY TELECOM/MODULAR			PRODUCT DESCRIPTION PLUG, RJ45(10X10)RND CBL			
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR		SIZE A	FSCM NO. 43321	DWG. NO. TDR10P10C
	SCALE: NONE		CAD FILE: TDR10P10C.SLDDRW		SHEET 1 OF 1		