


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
G	ECN 6881: UPD DRAWING FORMAT, PKG. AND DIMENSIONS.	6/12/13	D. DESJARDIN

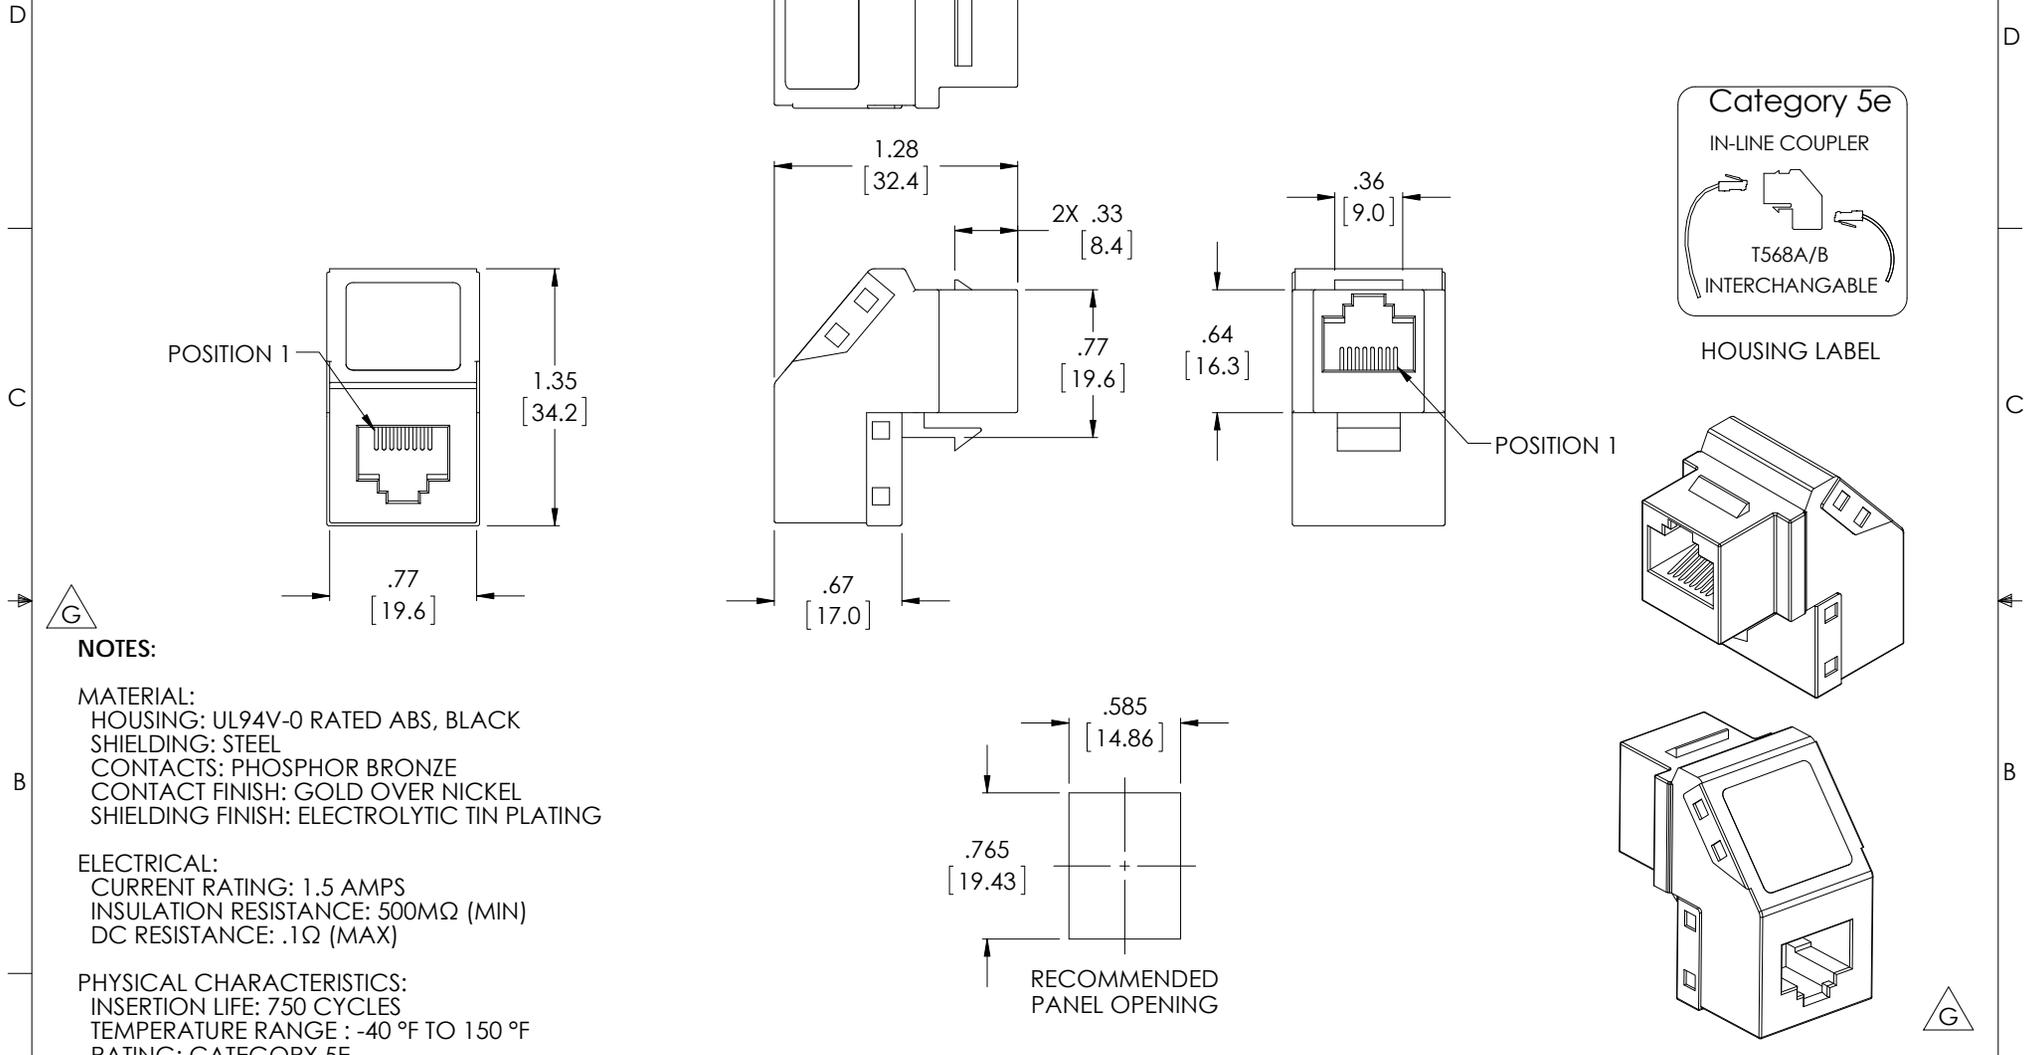

**NOTES:**

**MATERIAL:**  
 HOUSING: UL94V-0 RATED ABS, BLACK  
 SHIELDING: STEEL  
 CONTACTS: PHOSPHOR BRONZE  
 CONTACT FINISH: GOLD OVER NICKEL  
 SHIELDING FINISH: ELECTROLYTIC TIN PLATING

**ELECTRICAL:**  
 CURRENT RATING: 1.5 AMPS  
 INSULATION RESISTANCE: 500MΩ (MIN)  
 DC RESISTANCE: .1Ω (MAX)

**PHYSICAL CHARACTERISTICS:**  
 INSERTION LIFE: 750 CYCLES  
 TEMPERATURE RANGE : -40 °F TO 150 °F  
 RATING: CATEGORY 5E  
 WIRING: STRAIGHT THROUGH  
 MAXIMUM PANEL THICKNESS: .07"

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

ALL DIMENSIONS ARE FOR REFERENCE ONLY.

**REGULATORY COMPLIANCE:**  
 ROHS, CE

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS DRAWN BY RON CARRICK	DATE 12/7/2001
	CHECKED BY C.MCCORMICK	DATE 12/7/2001
	APPROVED BY DOUG PARHAM	DATE 12/7/2001
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE

	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845	
	CATEGORY <b>TELECOM/MODULAR</b>	
PRODUCT DESCRIPTION <b>PNL CPLR 8X8 CAT5E KYSTNE SHLD</b>		
SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>UJ5T568S</b>
SCALE: NONE		CAD FILE: UJ5T568S.SLDDRW
SHEET 1 OF 1		REV. <b>G</b>

A

A