
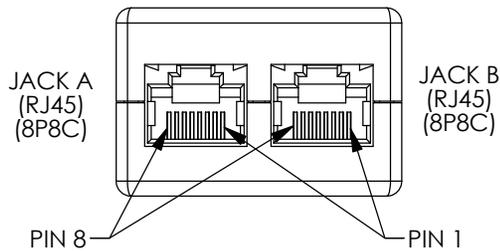


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 6364: ADDED PANTONE COLOR NUMBERS, REVISED CHARMILLES TO #30	8/24/12	D.FRISIELLO
F	ECN 6770: REVISE L-COM COVER LABEL	4/3/13	D.FRISIELLO
G	ECN 7826: REVISED 3D MODEL, FORMAT, ROHS	3/4/15	D.FRISIELLO

WIRING MAP		
"P1"	JACK A	JACK B
PIN #	PIN #	PIN#
1	1	1
2	2	2
3	3	3
4	4	4
5	5	5
6	6	6
7	7	7
8	8	8
USOC-8 / USOC-8		

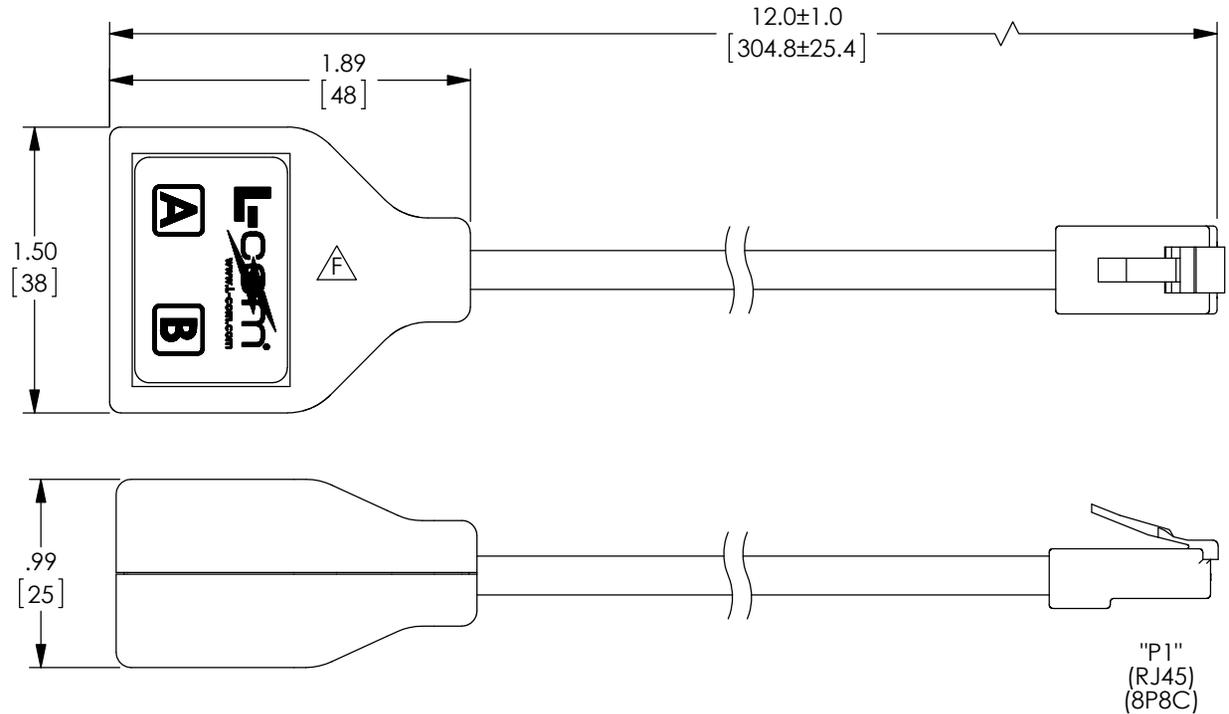

**SPECIFICATIONS:**

ASSEMBLY MEETS REQUIREMENTS OF EIA / TIA 568 CATEGORY 3.

**MATERIALS**

- PLUG: POLYCARBONATE, UL94V-1
- CONTACTS: PHOSPHOR BRONZE WITH 50 μINCHES GOLD PLATE ON CONTACT SURFACES
- JACKS HOUSING: ABS PLASTIC, BLACK, UL94V-0
- HOUSING FINISH: #30 CHARMILLES
- CONTACTS: PHOSPHOR BRONZE WITH 50 μINCHES GOLD PLATE ON CONTACT SURFACES

- CABLE: UNSHIELDED CATEGORY 3 OR BETTER
- 4 TWISTED PAIRS, 24 AWG STRANDED COPPER
- UL LISTED COMMUNICATION CABLE, TYPE CM
- JACKET: PVC, GRAY, (PANTONE 424C)

INCLUDE ONE (1) SHEET OF 1AW02-010 IN EACH POLY BAG.  
 ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.  
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.  
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**

CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ±.005 [1.13]	APPROVALS DRAWN BY DOUG PARHAM CHECKED BY TOM CLARK APPROVED BY RON CARRICK	DATE 1/17/2001 1/18/2001 1/23/2001		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY <b>TELECOM/MODULAR</b>	
	PROJECTION 		PRODUCT DESCRIPTION <b>Y-BRIDGE (8X8)M/ 2 (8X8)F</b>	
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>ECS204-1</b>

SCALE: NONE | CAD FILE: ECS204-1.SLDRW | SHEET 1 OF 1